

Date

Agent

Shipping

- ☐ by the sender
- ☐ by the recipient
- ☐ through a carrier

Customer

address

City/Zip code

Tel./fax

e-mail

VAT number

Reference

Destination

Address

Reference

Tel./mobile


NOTES

DISCOUNT

POS	QTy	DIMENSIONIS (1)						COLORS					MOTION				GUIDE	BRACKET AND BEARING (11)	SQUARE PIVOT (11)	TELESCOPIC TUBE (11)
								CURTAIN		GUIDE		PLASTIC	SIDE (7)	TYPE (8)	CONTROL		COD. (10)			
		L (1)	H1 (2)	S (3)	H3 (4)	W (5)	P (5)	TYPE (6)	COD.	TYPE (6)	COD.	COD.			TYPE (9)	QTy				

UNIT: mm - (1) width (see Page 2) - (2) height from threshold to under box - (3) Thickness of the ceiling or lower base of the box - (4) height from threshold to center axis - (5) indicate the width W and the depth P of the guide channel (see Page 2)- (6) coarse, RAL, wood effect, anodized - (7) LEFT, RIGHT, BIF (for twin rolling shutter) - (8) MANUAL, STANDARD, SOMFY, CHERUBINI, NERO, IDEMO - (9) with standard motor leave BLANK; with Somfy motors specify: T.MONO (remote single channel control); T.MULTI (remote multi-channel control); SMOOVE (wall radio control); DRY (Dry contact transmitter); with Cherubini motors specify: T.MONO (remote single channel control); T.MULTI (remote multi-channel control); WALL (wall radio control); with Idemo motors specify: T.MULTI (remote multi-channel control); with Nero motors specify: T.MONO (remote single channel control); T.MULTI (remote multi-channel control); GO-P1 (wall radio control) - (10) indicate the code of the desired guide (leave blank if not desired - see Page 2) - (11) mark with an X the option required.

Rolltek Ala can be installed in openings with a width from a minimum of 600 mm to a maximum of 2400 mm. When ordering, it is necessary to communicate the type of guide (if desired) as well as the dimensions "L", "H1", "S", "H3" (look at the following figures). The guide, if provided by the customer, must have internal width (W) and depth (P) not less than 18 mm and 24 mm respectively. To avoid errors, in the case of guide provided by the customer, always indicate P and W. We recommend to perform three measurements of the dimension "L" in three different heights communicating the smallest value. The right or left side is determined by looking at the shutter from the inside outward. The boxes are made with frontal opening or lower opening. We prefer the boxes with frontal opening. In the case of motorized roller shutter, you have to prepare an electric 230V power supply inside the box. If you choose the standard motor or Cherubini motor you have to put a toggle switch on the wall. If you choose Somfy motor with remote control you only need to prepare a 230V power supply inside the box. The external dimension of the slats, in maximum tilting position (60°) is 34 mm beyond the guide. On the inside the slats never protrude beyond the guide. The octagonal tube (60 mm - diameter of the inscribed circle) is 20 cm longer than l (10 cm each side). Before assembly cut the octagonal tube to desired size. The price shown in the list also includes the part of the blind inside the box.

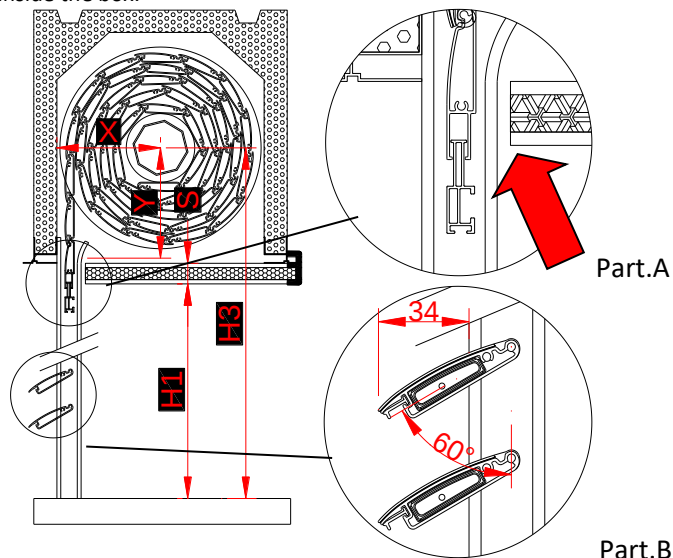


WINDINGS			
H1	Ø	X	Y
1000	200	105	110
1200	205	110	115
1400	210	110	115
1600	220	115	120
1800	225	120	125
2000	230	120	125
2200	235	125	130
2400	245	130	135
2600	255	135	140
2800	265	140	145
3000	275	145	150


Value are in mm

Part. A - With the shutter open, the maximum high limit switch position is reached when the positioner profile is below the box (see red arrow).


Part. B - The maximum orientation is 60°. In this position, the slat only protrudes outwards by 34 mm.



TK1431
Single guide
Weight 0,320 kg/m




TK1436
Guide with small shoulder
Weight 0,590 kg/m

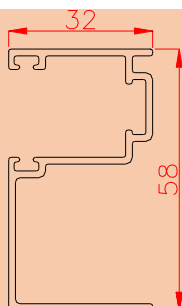

TK1438
Guide with great shoulder
Weight 0,670 kg/m

GUIDE PROVIDED BY CUSTOMER

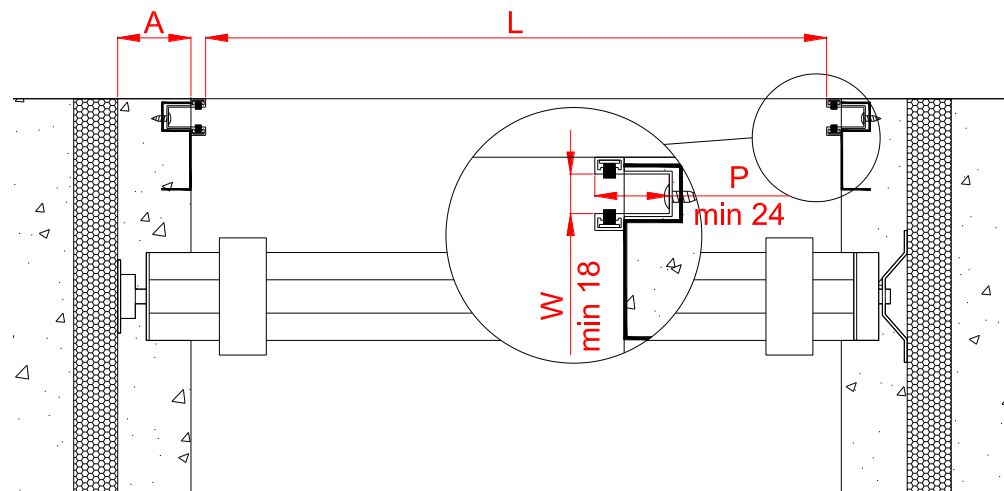

GUIDE PROVIDED BY ROLLTEK

