

AT2

sustav aluminijskih profila i pribora
za kontinuirane staklene ograde



TEHNIČKI PODATCI

SPEC. TEŽINA PROFILA
4,625 kg/m'

DUŽINA PROFILA
6.500 mm

ŠIRINA PROFILA
55 mm

VISINA PROFILA
120 mm

MATERIJAL
ALUMINIJ EN AW 6060

STAKLO
8.8.2

OPTEREĆENJE
Certificirano na opterećenje od
1 kN uz staklo 8.8

MONTAŽA
Pričvršćivanje stakla pomoću kajli
4 kemijska ili mehanička sidra po metru dužnom

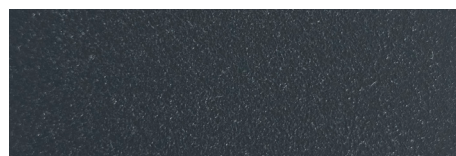
MAKSIMALNA VISINA
Do **1.100 mm**

CERTIFIKATI
Certificirao **INSTITUT IGH**, certifikati dostupni na zahtjev

LAGERSKE BOJE




**ARGENTO
SPAZZOLATO
IB-ARS-FR**



**RAL 7016
TEXTURED
T716**

Ostale boje i završne obrade dostupne na upit.





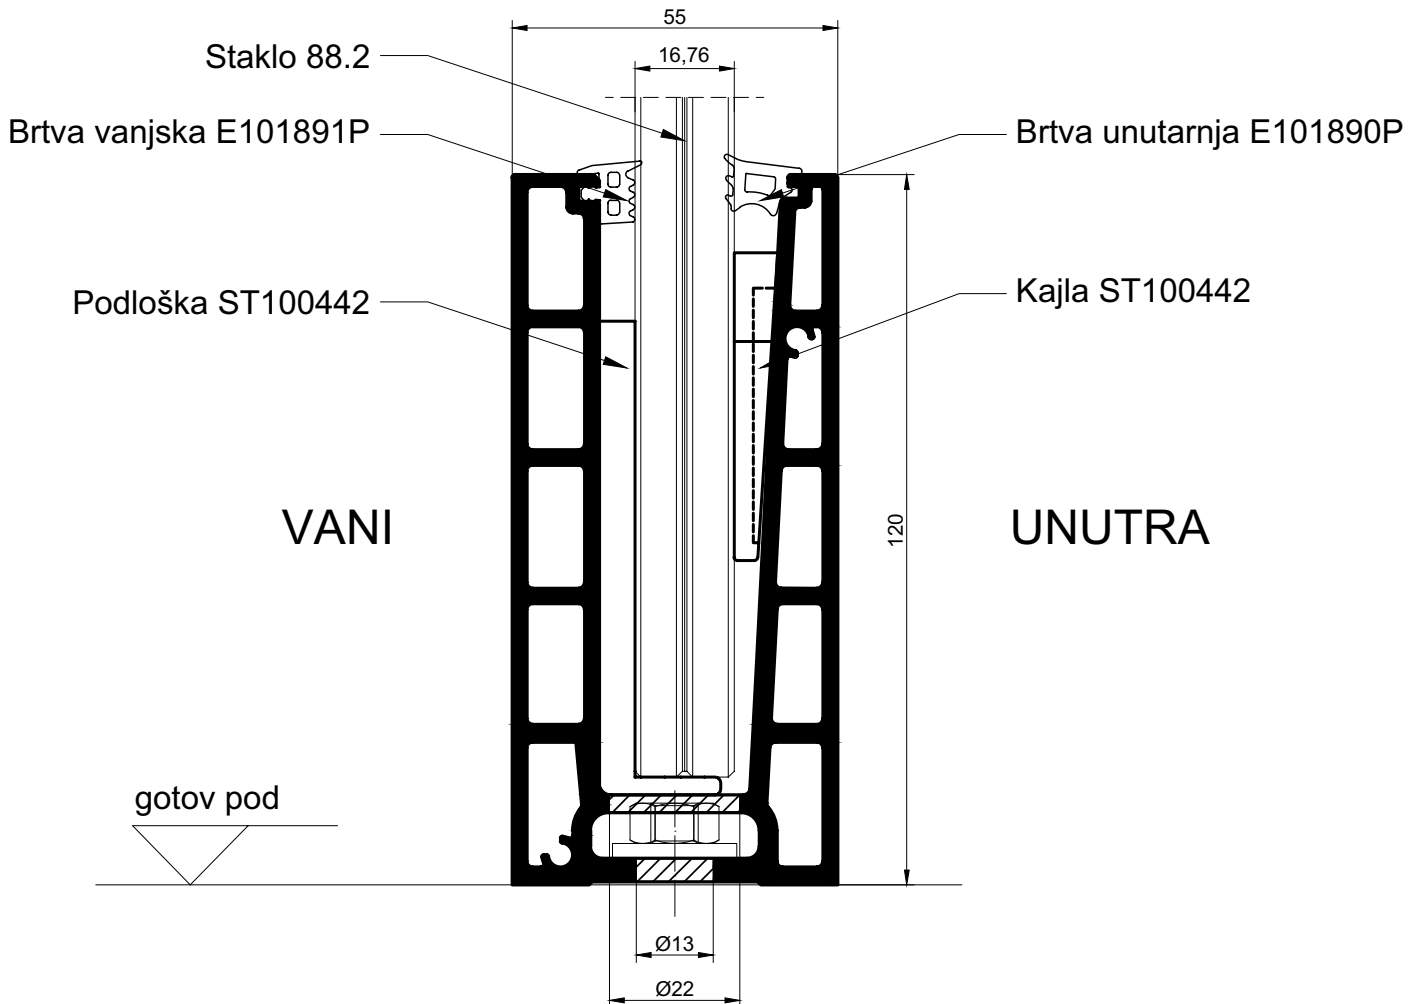
PRESJEK AT2



UPUTE ZA MONTAŽU

1. Probušiti i očistiti rupe, ubrizgati ljepilo i postaviti sidreni vijak.
2. Postaviti aluminijski profil i učvrstiti ga pomoću ključa.
3. Uvući vanjsku brtvu u profil, postaviti plastične podloške i umetnuti staklo.
4. Postaviti kajle, poravnati i fiksirati staklo kajlama uz pomoć predviđenog alata.
5. Umetnuti unutarnju brtvu te postaviti bočne poklopce.

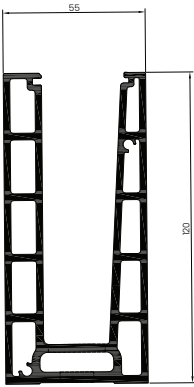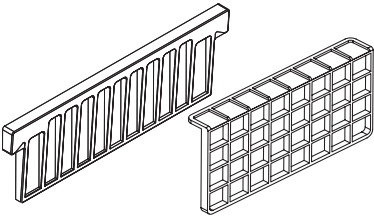CJENIK

SLIKA	ARTIKL	OPIS	MJ	VPC
	AT2.PR	ALUMINIJSKI PROFIL ZA STAKLENU OGRADU AT2 DOSTUPNE BOJE: T716, 1B-ARS-FR	KOM	313,00 €
	AT-ST100442P	SET PODLOŠKA+KAJLA ZA PROFIL AT2 STAKLO 8.8	KPL	2,40 €
	AT-ET101890P	UNUTARNJA BRTVA ZA PROFIL AT1, AT2 (PAK = 50m)	PAK	40,00 €
	AT-ET101891P	VANJSKA BRTVA ZA PROFIL AT2 STAKLO 8.8 (PAK = 50m)	PAK	36,00 €
	***	ČEP ALUMINIJSKI BOČNI ZA PROFIL AT2 ELOX/RAL 7016	KOM	***



AluK Tim d.o.o.
Žegoti 10, 51215 Kastav

t: +385 (0)51 691 461
e: info@aluk.hr

www.aluk.hr